


## 10x Passivation solution

for chip surface passivation (with thiol-reactive compound)

Dynamic Biosensors GmbH & Inc.

SOL-PAS-1-5 v2.1

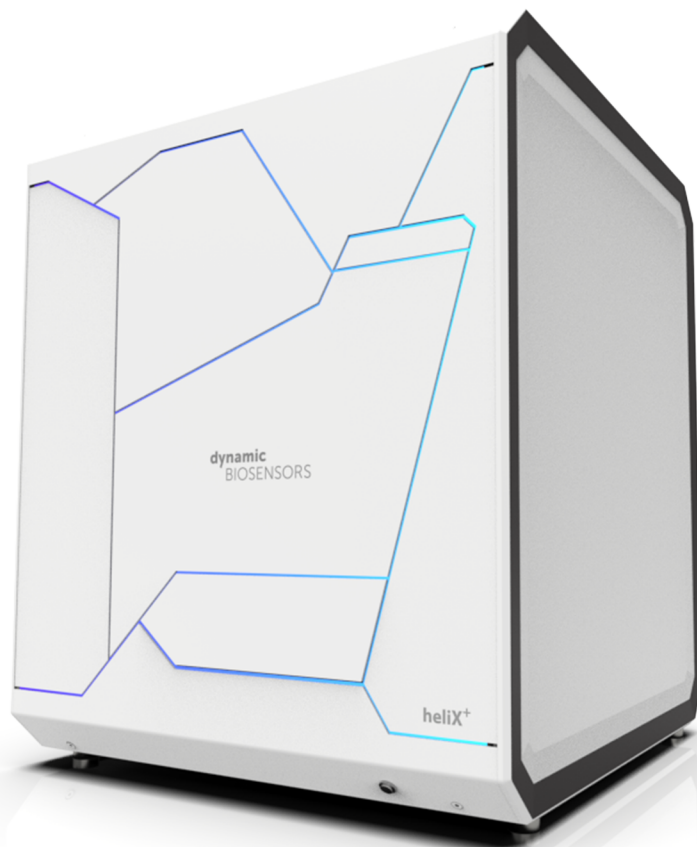

## Product Description

Order Number: **SOL-PAS-1-5**

*Table 1. Contents and Storage Information*

Material	Cap	Amount	Storage
<b>10x Passivation Solution</b>	Yellow	5 x 1 mL	-20°C

For research use only.

This product has a limited shelf life, please see expiry date on label.

## Preparation

Dilute 10x Passivation solution with ultrapure water by mixing the complete solution (1 mL) with 9 mL ultrapure water.

The diluted solution should be stored at 2-8°C and can be used for 2 weeks.

## Useful Order Numbers

*Table 2. Order Numbers*

Product Name	Comment	Order Number
<b>heliX<sup>®</sup> Adapter Chip</b>	Chip with 2 detection spots	ADP-48-2-0
<b>Regeneration solution</b>	For regeneration of chip surface	SOL-REG-1-5

## Contact

**Dynamic Biosensors GmbH**

Perchtinger Str. 8/10  
81379 Munich  
Germany

**Dynamic Biosensors, Inc.**

300 Trade Center, Suite 1400  
Woburn, MA 01801  
USA

**Order Information** [order@dynamic-biosensors.com](mailto:order@dynamic-biosensors.com)

**Technical Support** [support@dynamic-biosensors.com](mailto:support@dynamic-biosensors.com)

[www.dynamic-biosensors.com](http://www.dynamic-biosensors.com)

Instruments and chips are engineered and manufactured in Germany.

©2024 Dynamic Biosensors GmbH | Dynamic Biosensors, Inc. All rights reserved.