
switchSENSE® BIOCHIP MPC2-96-2-G1R1-S

Product Description

Product Code	MPC2-96-2-G1R1-S
Suitable for	switchSENSE [®] DRX ^{red} & DRX ²
Storage	Store at 2-8 °C, dry in the dark
Layout	Each spot, mixture of nanolevers A and B
Grade	Standard

Multi-purpose chips are versatile tools to analyze protein-protein, protein-small molecule, DNA/RNA-protein and DNA/RNA-small molecule interactions.

Biochip Design

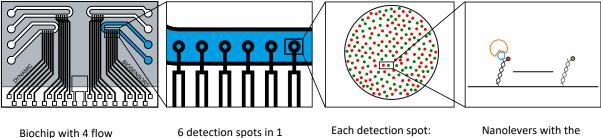

Biochip with 4 flow channels, each with multiple detection spots in series 6 detection spots in 1 flow channel

Each detection spot: nanolevers with red fluorescent dyes Nanolevers with the same sequence and fluorescent dye

dynamic BIOSENSORS

The detection spots are functionalized with two different nanolevers, NL-A96 and NL-B96. The 5'-end of the DNA is fixed on the surface while the 3'-end carries a fluorescent dye, either a green one (G1) on NL-A96 or a red one (R1) on NL-B96.

Biochip Layout I Flow channels with 6 double (A, B) spots (real-time on-spot referencing or sophisticated assays)

MPC2 biochips carry a mixture of two nanolever populations (red & green) on the same sensor spot. Use one nanolever as the target and the other as the control for absolute data confidence or use this set-up to investigate more complex and challenging issues.



For more information about the DNA sequences, please contact us at <u>info@dynamic-biosensors.com</u>.

DNA for the Biochip

Each Biochip comes with unmodified complementary DNA: cNL-A96 (500 μ L, c = 1 μ M) cNL-B96 (500 μ L, c = 1 μ M)



Application Areas

Binding Kinetics	k _{on} , k _{off} , K _D
Binding Affinity	K_D , titration curve, n (Hill coefficient)
Protein Diameter	D _H (Hydrodynamic diameter)
Conformational Change	ΔD_H (relative change of hydrodynamic diameter)
Melting & Thermodynamics	Τ _Μ , ΔG, ΔΗ, ΔS
Multimers & Aggregation	Monomer-dimer discrimination, aggregation
Nuclease & Polymerase Activity*	k _{cat} , K _M , T _{activate}
Bispecific Binders & Avidity*	Binding affinity/avidity/kinetics;

* for this application, other biochips (ENZ or BIF) are recommended

Biochip Handling

The biochip is ready to use. For research use only.

Avoid touching or picking up the biochip with your hands as this may cause electrostatic discharge, which harms the biolayer. Instead, always use the vacuum tweezers provided with the instrument when handling the biochips.

After installing the biochip in the DRX instrument and before starting an experiment be sure that the selected channel has been passivated with passivation solution (Order No. SOL-PAS-1-5).

More information about biochip storage and handling can be found in the document "switchSENSE® Biochips Storage Information" – <u>DOWNLOAD HERE</u>.

Grade I Standard

Standard grade chips are batch tested, which means selected chips undergo comprehensive quality control (switching dynamics, voltage-response of the DNA layer, and fluorescence levels). In addition, the fluorescence levels on each electrode are tested to be within specifications. Due to the production process not all detection spots fulfill our high quality standards. It is guaranteed that 20 or more detection spots are QC approved.

Compatible Functionalization Kits

All compatible functionalization kits for this biochip are listed on our website: www.dynamic-biosensors.com/reagents/

Contact

Dynamic Biosensors GmbH Lochhamerstr. 15 82152 Martinsried/Planegg Germany

Order Information Phone: +49 89 89 74 544 0 order@dynamic-biosensors.com Dynamic Biosensors Inc. 9705 Carroll Centre Road, Suite 100 San Diego, CA 92126 USA

Technical Support Phone: +49 89 89 74 544 66 support@dynamic-biosensors.com

MPC2-96-2-G1R1-S_v20190301