### **Product Description**

Product Code MPC-96-2-R1-S


Suitable for switch SENSE® DRX<sup>red</sup> & DRX<sup>2</sup>
Storage Store at 2-8 °C, dry in the dark

Layout 2 reference spots (nanolever A) and 4 probe spots (nanolever B)

Grade Standard

Multi-purpose chips are versatile tools to analyze protein-protein, protein-small molecule, DNA/RNA-protein and DNA/RNA-small molecule interactions.


### **Biochip Design**

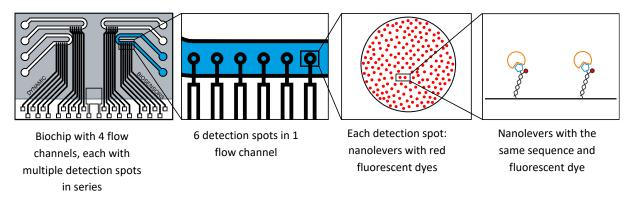

The detection spots are functionalized with one nanolever, either NL-B96 on probe spots or NL-A96 on reference spots. The 5'-end of the DNA is fixed on the surface while the 3'-end carries a red fluorescent dye (R1).

# Biochip Layout I Flow channel with 2 reference (A) & 4 probe (B) spots (end-point referencing in same channel)

This biochip - presenting 2 reference sequence (NL-A96) and 4 probe sequence (NL-B96) spots - enables to measure the reference in the same flow channel.



For more information about the DNA sequences, please contact us at <a href="mailto:info@dynamic-biosensors.com">info@dynamic-biosensors.com</a>.

## DNA for the Biochip

Each Biochip comes with unmodified complementary DNA:

cNL-A96 (500  $\mu L$ ,  $c = 1 \mu M$ )

cNL-B96 (500  $\mu$ L, c = 1  $\mu$ M)



## **Application Areas**

Binding Kinetics	k <sub>on</sub> , k <sub>off</sub> , K <sub>D</sub>
Binding Affinity	K <sub>D</sub> , titration curve, n (Hill coefficient)
Protein Diameter	D <sub>H</sub> (Hydrodynamic diameter)
Conformational Change	$\Delta D_H$ (relative change of hydrodynamic diameter)
Melting & Thermodynamics	Τ <sub>M</sub> , ΔG, ΔΗ, ΔS
Multimers & Aggregation	Monomer-dimer discrimination, aggregation
Nuclease & Polymerase Activity*	K <sub>cat</sub> , K <sub>M</sub> , T <sub>activate</sub>
Bispecific Binders & Avidity*	Binding affinity/avidity/kinetics;

<sup>\*</sup> for this application, other biochips (ENZ or BIF) are recommended

### **Biochip Handling**

The biochip is ready to use. For research use only.

Avoid touching or picking up the biochip with your hands as this may cause electrostatic discharge, which harms the biolayer. Instead, always use the vacuum tweezers provided with the instrument when handling the biochips.

After installing the biochip in the DRX instrument and before starting an experiment be sure that the selected channel has been passivated with passivation solution (Order No. SOL-PAS-1-5).

More information about biochip storage and handling can be found in the document "switchSENSE® Biochips Storage Information" – DOWNLOAD HERE.

#### Grade I Standard

Standard grade chips are batch tested, which means selected chips undergo comprehensive quality control (switching dynamics, voltage-response of the DNA layer, and fluorescence levels). In addition, the fluorescence levels on each electrode are tested to be within specifications. Due to the production process not all detection spots fulfill our high quality standards. It is guaranteed that 20 or more detection spots are QC approved.

#### Compatible Functionalization Kits

All compatible functionalization kits for this biochip are listed on our website: www.dynamic-biosensors.com/reagents/

#### Contact

Dynamic Biosensors GmbH

Lochhamerstr. 15

82152 Martinsried/Planegg

Germany

Order Information

Phone: +49 89 89 74 544 0

order@dynamic-biosensors.com

Dynamic Biosensors Inc.

9705 Carroll Centre Road, Suite 100

San Diego, CA 92126

USA

**Technical Support** 

Phone: +49 89 89 74 544 66

support@dynamic-biosensors.com